

# USCG DOORS

## A CLASS DOOR



## SC-A15-H

### A15 FIRE DOOR

Complies with USCG requirements as defined in 46 CFR 72-05-25, 46 CFR 116.435, NVIC 9-97 for A15 Class bulkhead doors

FRAME : 1/8" steel Z Frame  
Bolt-In or Weld-In Application


BLADE: Two steel 16 gage pans filled with  
USCG approved insulation core  
1 3/4" blade thickness.

Four door edges trimmed with  
painted or stainless channel.

To be fitted with backing plates  
top or bottom for attachment of closers or  
other hardware.

HARDWARE: Hinges- Stainless Steel  
Locksets- Trioving Marine or  
Best Access cylindrical  
3/4" throw per USCG  
Closer- Norton, shipped loose


FINISH: Prime Painted or Finish Painted

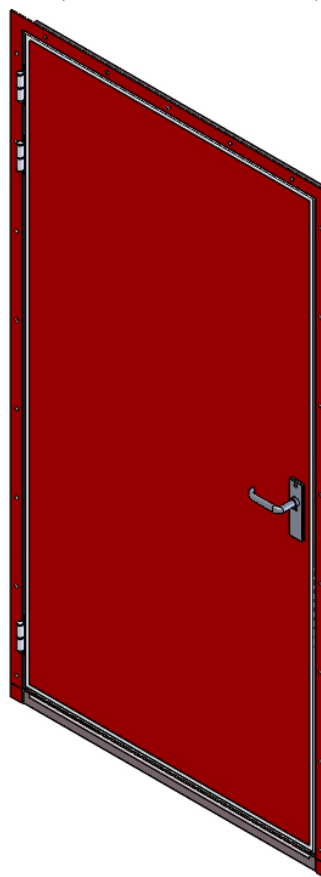


VISION



SINGLE  
DOOR



DOUBLE  
DOOR



HOSE PORT



PANIC BAR

[sales@shipinteriorsystems.com](mailto:sales@shipinteriorsystems.com)  
[www.shipinteriorsystems.com](http://www.shipinteriorsystems.com)  
541-436-4440

**SHIP INTERIOR SYSTEMS**

SHIP INTERIOR SYSTEMS, LLC  
1767 12th Street #128  
Hood River, OR 97031

DESIGN • ENGINEERING • SUPPLY

DOORS