

USCG DOORS

A CLASS DOOR



SC-A60-H

A60 FIRE DOOR

Complies with USCG requirements as defined in 46 CFR 72-05-25, 46 CFR 116.435, NVIC 9-97 for A60 Class bulkhead doors

FRAME : 3/16" steel Z Frame or J Frame
Bolt-In or Weld-In Application


BLADE: Two steel 16 gage pans filled with
USCG approved insulation core
2 1/2" blade thickness.

Door edges trimmed with
painted or stainless channel.
Lipped door as option.


To be fitted with backing plates
top or bottom for attachment of closers or
other hardware.

HARDWARE: Hinges- Stainless Steel
Locksets- Trioving Marine or
Best Access cylindrical
3/4" throw per USCG
Closer- Norton, shipped loose


FINISH: Prime Painted or Finish Painted

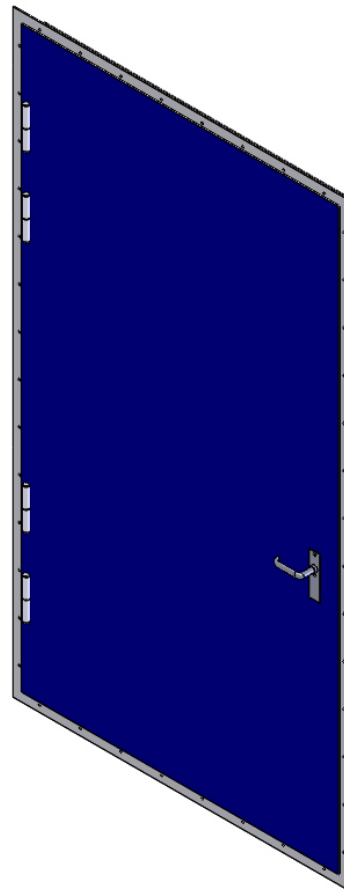

VISION



SINGLE
DOOR



DOUBLE
DOOR



HOSE PORT



PANIC BAR

sales@shipinteriorsystems.com
www.shipinteriorsystems.com
541-436-4440

SHIP INTERIOR SYSTEMS

SHIP INTERIOR SYSTEMS, LLC
1767 12th Street #128
Hood River, OR 97031

DESIGN • ENGINEERING • SUPPLY

DOORS